

# Bayfield Beach Stormwater Monitoring 2018



Prepared for the Bluewater Beach Committee

by

Hope Brock and Mari Veliz

Ausable Bayfield Conservation Authority (ABCA)

71108 Morrison Line, R.R. 3, Exeter, Ontario, N0M 1S5

February 2019



## Introduction

Communities along the southeast shore of Lake Huron are in part dependent on the tourism industry (e.g., swimming, fishing and boating opportunities in Lake Huron) for economic sustainability. Increased levels of bacteria, nutrients and sediment however, can sometimes result in degraded water quality and ultimately limit recreational opportunities. These contaminants are largely associated with both agricultural and urban non-point source pollution that gets washed into rivers, creeks and storm sewers during snow melts and rain events.

Since 2011 residents of the Main Bayfield watershed have been actively involved in a community-based watershed planning process to help improve water quality within the Bayfield River, which flows into Lake Huron at the village of Bayfield. The Bayfield Main Beach has been a recipient of the internationally-recognized Blue Flag program, which among other things, identifies beaches that meet strict criteria for water quality. To help maintain this certification and support water quality initiatives in the area, the Bluewater Beach Committee was formed. This committee is supported by the Pioneer Park Association, Municipality of Bluewater, Huron County Health Unit, and Ausable Bayfield Conservation Authority (ABCA).

The village of Bayfield has stormwater outlets along the beach. A stormwater monitoring program was initiated in the summer of 2014 to evaluate these proximate potential sources of pollution. The goal of this program was to gather initial water quality data from the stormwater outfalls along the beach at the village of Bayfield. This program was continued in 2015, 2016, 2017 and 2018, and will help in determining whether the stormwater from the village of Bayfield might be impacting the beach and nearshore water quality.

For the purposes of this program, all water quality data was collected by a dedicated group of citizen scientists. Citizen science is scientific work undertaken by members of the general public under the direction of professional scientists and organizations. Not only does citizen science allow participants to make valuable contributions to research, but it also serves the critical role of linking people with science to better understand and protect our natural environment. As this happens, citizen scientists can engage their fellow community members and enhance outreach and education initiatives.

## Methods

### *Site Description*

Water quality was monitored at two stormwater outfalls along the beach adjacent to the village of Bayfield, Ontario, and at one culvert along the road (Tuyll Street) adjacent to the shoreline (Figure 1). A new outlet for the Colina outfall (150 mm) was completed as part of the rain garden installation at Pioneer Park in the fall of 2016. It now outlets at the bottom of the bank, as does the Delevan outfall (750 mm). Despite the construction of the new outfall at Colina, some water still flows down the bank. The source of this ephemeral channel needs to be further investigated to determine where it originates. Both Colina and Delevan were designated stormwater outlets for the village of Bayfield (BM Ross 2014). The Tuyll site was also modified in 2016/2017, and now includes a combination of a tile (which comes from under Tuyll Street) and catch basin, which then outlets at the bottom of the bank. According to a report on storm drainage for the village of Bayfield (BM Ross 1985), existing tile drainage for the most developed portion of the village is directed towards the Delevan outfall or an open water course that discharges at the top of the bank (*i.e.*, Tuyll).

The village of Bayfield, which is within the Municipality of Bluewater, is mostly residential with businesses along its main street. It is serviced by the Bayfield Sewage Treatment Plant.



**Figure 1.** Approximate locations of three stormwater monitoring sites and public beaches along the Lake Huron shoreline in Bayfield, Ontario.

### Water Sampling

Beginning in June water samples were collected every other week until the end of August. These routine monitoring events took place on predetermined dates. They were not initiated by wet weather, but typically occurred during a dry weather day (dry sampling). Water samples were also collected

after rain events (event sampling), which were characterized as greater than 2.6 mm of rain in less than one hour. If a rain event occurred overnight, sampling was done as soon as possible the following morning.

Grab samples were collected by holding the sample bottle within the flowing water from the outfall, and without touching surrounding surfaces. If water was not flowing from the outfalls, no sample was collected, regardless of whether ponded water was observed below the outfall.

Water samples were analyzed by ALS Environmental in Waterloo, Ontario, to determine the concentrations of *Escherichia coli* (*E. coli*) in colony forming units per 100 millilitres of water (cfu/100 mL), total phosphorus (TP) and soluble reactive phosphorus (SRP) in mg/L.

### *Data Interpretation*

Geometric means were used to summarize *E. coli* and TP concentrations for each monitoring site. A geometric mean is a type of mean or average whereby the effect of uncommonly high or low concentrations on a mean is reduced. Geometric means (dry and event sampling) were calculated for each monitoring site for the months of June through August 2018. These geometric mean concentrations were compared to provincial guidelines for *E. coli* and TP. SRP and TP geometric mean concentrations were used to determine SRP as a percentage of the TP. In some cases SRP concentrations exceeded TP concentrations. These exceedances result from the analysis of separate aliquots of each water sample. Where SRP concentrations were higher than TP concentrations, percentages were determined to be 100 percent. Detection limits were used as actual concentrations for any *E. coli*, TP or SRP concentrations that came back from the lab as less than the detection limit.

Daily precipitation levels were helpful for understanding some of the variability in *E. coli* and phosphorus concentrations. Precipitation data were obtained from a rain gauge maintained by the ABCA in Bayfield, Ontario.

## **Results and Discussion**

### *Escherichia coli*

*Escherichia coli* (*E. coli*) are fecal coliform bacteria commonly found in the intestinal tract of warm-blooded animals. While *E. coli* itself is not a threat to the environment, its presence in water collected from drains may indicate contamination by other harmful bacteria, viruses, or parasites that are associated with animal wastes. Sources may include human, pets, livestock and wild animals. Up until 2018, the recreational guideline for *E. coli* was 100 colony forming units (cfu) per 100 mL (MOEE 1994). The Ontario Ministry of Health and Long-term Care now follows the rest of Canada in using the Guidelines for Canadian Recreational Water Quality, which sets the recreational guideline for *E. coli* as follows:

1. Geometric mean concentration for a minimum of five samples  $\leq$  200 cfu/100 mL
2. Single-sample maximum concentration  $\leq$  400 cfu/100 mL

For the purposes of this study in which single samples were collected from each monitoring site, results were compared to the single-sample maximum of 400 cfu/100 mL.

Concentrations of *E. coli* at the outfalls ranged from 1 cfu/100 mL at Delevan (June 18 and July 16) to 1800 cfu/100 mL at Colina (August 29) (Table 1). Concentrations of *E. coli* at Delevan and Tuyll were higher following rain events than routine (dry) sampling dates (no samples were collected from Colina on routine sampling dates as there was no flow). Elevated concentrations were greater than the recreational guideline of 400 cfu/100 mL, and exceeded it by one order of magnitude after three rain events (*i.e.*, August 8 at Delevan; August 21 at all three sites; August 29 at Colina).

**Table 1.** *Escherichia coli* concentrations, in colony forming units (cfu) per 100 mL on each sampling day in 2018 for three stormwater monitoring sites draining into Lake Huron along the shoreline of Bayfield, Ontario. Highlighted values denote concentrations that exceed the Guideline for Canadian Recreational Water Quality (single sample) of 400 cfu/100 mL. Shaded columns indicate event sampling dates.

Site	Jun 4	Jun 18	Jun 24	Jul 3	Jul 16	Jul 23	Jul 30	Aug 1 <sup>ab</sup>	Aug 7 <sup>ab</sup>	Aug 8 <sup>ab</sup>	Aug 13	Aug 21 <sup>ab</sup>	Aug 27 <sup>b</sup>	Aug 29 <sup>ab</sup>
Colina	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	1340	ns	1800
Tuyll	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	1320	84	250
Delevan	5	1	130	32	1	43	3	890	220	1320	33	1230	270	dns

<sup>a</sup> More than 10 mm of rainfall in 24 hours prior to sampling.


<sup>b</sup> More than 10 mm of rainfall in 48 hours prior to sampling.

<sup>c</sup> More than 70 mm of rainfall in 3 days prior to sampling.

ns = no sample was collected due to lack of flow.

dns = did not sample due to safety concerns.

The geometric mean *E. coli* concentration for Delevan for dry sampling was 9 cfu/100 mL (n=7). Geometric means for Tuyll and Colina were not calculated for dry sampling as there was only one sample collected at Tuyll and none at Colina. Geometric mean *E. coli* concentrations increased to 348 cfu/100 mL (n=6) at Delevan for event sampling (Figure 2). Geometric mean concentrations for Tuyll and Colina were not calculated because of an insufficient number of samples collected for each of these sites. The geometric mean *E. coli* concentration for Delevan was just below the newly-adopted Canadian Recreational Water Quality guideline following rain events.

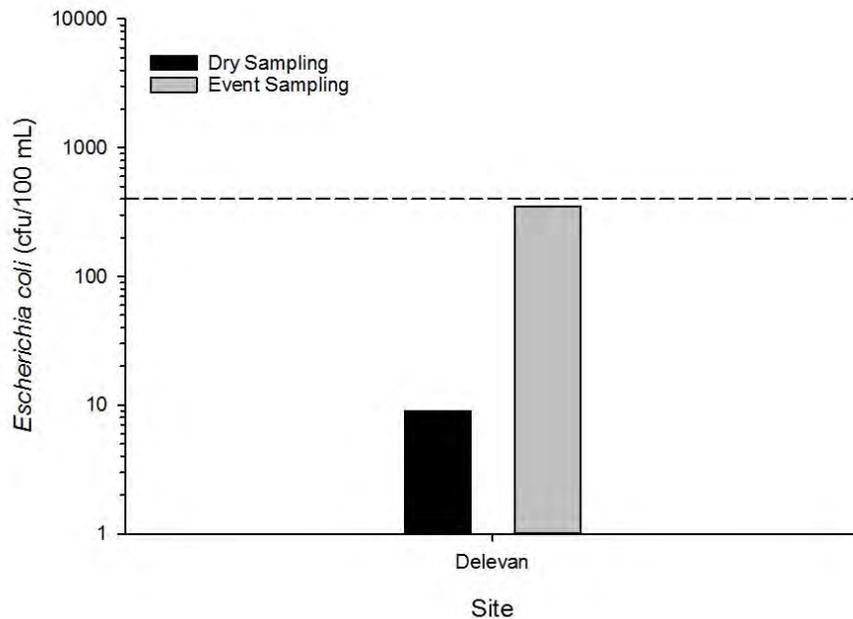

**Figure 2.** Dry (n=7) and event (n=6) sampling geometric mean *Escherichia coli* concentrations in colony forming units per 100 mL at one stormwater monitoring site draining into Lake Huron along the shoreline of Bayfield, Ontario in 2018. Dashed line indicates Canadian Recreational Water Quality guideline for a single sample of 400 cfu/100 mL. Dry and event sampling geometric mean *Escherichia coli* concentrations for Tuyll and Colina were not calculated due to an insufficient number of samples collected at each of these sites.

Bacterial contaminants in urban stormwater can originate from both human and animal sources. Since the village of Bayfield has a separate system for sanitary sewers, *E. coli* contamination is more likely a result of stormwater runoff that has come into contact with domestic and/or wild animal waste. Results from previous stormwater microbial source tracking (Brock and Veliz 2017) supports this theory. Pick up and proper disposal of pet waste should be encouraged throughout the village. It is also important the Municipality of Bluewater ensure there are no cross connections or leaks between sanitary sewers or old septic systems and stormwater drainage facilities in the areas drained by the outfalls.

The abundance of fecal bacteria has been strongly linked to the amount of impervious (not allowing water to pass through) surfaces within a watershed (Mallin *et al.* 2000). Protecting and creating green space in existing and new urban development is therefore an essential component of ensuring good water quality at the beach in the village of Bayfield. Low impact development (LID) is an approach to land development that mimics the natural movement of water in order to manage stormwater close to where it falls (CVC 2015). The following LID techniques reduce runoff in urban areas by increasing infiltration (process by which water on the ground surface enters the soil) and slowing water down:

- Naturalized landscapes (trees/shrubs/flowers absorb more rainwater than regular patch of grass)
- Rain barrels
- Rain gardens (shallow depressions that contain soil and plants that promote infiltration and treat pollutants)
- Green roofs (vegetation or roof-top gardens that absorb rainwater)
- Infiltration trenches/soakaways (underground reservoirs that collect and filter rainwater)
- Grass swales (open vegetated channels that slow stormwater, promote infiltration and trap and treat pollutants)
- Permeable pavement (concrete or asphalt that allows water to drain through and infiltrate into soil)

### *Total Phosphorus*

Total phosphorus (TP) includes phosphorus that is dissolved in water and insoluble phosphorus that binds to organic and inorganic material in water. In many aquatic systems, phosphorus is the nutrient that limits plant growth. When phosphorus is added to the system, the first response may be increased plant and algae growth. These conditions can result in aesthetic concerns, especially along shorelines and public beaches. Nutrient over-enrichment can result in excess plant growth and algal blooms, which can negatively impact aquatic life and further impede recreational waters. The Government of Ontario established a Provincial Water Quality Objective (PWQO) for TP of 0.030 mg/L to prevent eutrophication (excessive algae and aquatic plant growth, shortened food chains, changes in the aquatic plant and animal communities) (MOEE 1994).

Concentrations of TP ranged from 0.030 mg/L at Tuyll (August 27) to 0.121 mg/L at Delevan (August 21) (Table 3). The PWQO for TP was exceeded at Delevan for all sampling dates (dry and event) that a sample was collected, whereas TP concentrations only exceeded the PWQO after rain events at Tuyll and Colina. No samples were collected during dry sampling for Colina, and only once for Tuyll (August 27).

The dry sampling geometric mean TP concentration for Delevan was 0.047 mg/L (n=7). Geometric means for Tuyll and Colina were not calculated for dry sampling as there were only two samples collected at Tuyll and none at Colina. The event sampling geometric mean concentration for Delevan was 0.066 mg/L (n=5) (Figure 3). No event sampling geometric mean concentration was calculated for Tuyll or Colina due to insufficient data. Both dry and event sampling geometric mean TP concentrations at Delevan exceeded the water quality objective.

**Table 3.** Total phosphorus (TP) and soluble reactive phosphorus (SRP) in mg/L on each sampling day in 2018 for three stormwater monitoring sites draining into Lake Huron along the shoreline of Bayfield, Ontario. Highlighted values denote concentrations that exceed the Provincial Water Quality Objective (PWQO) of 0.030 mg/mL. Shaded columns indicate event sampling dates.

Site	Jun 4	Jun 18	Jun 24	Jul 3	Jul 16	Jul 23	Jul 30	Aug 1 <sup>ab</sup>	Aug 7 <sup>ab</sup>	Aug 8 <sup>ab</sup>	Aug 13	Aug 21 <sup>ab</sup>	Aug 27 <sup>b</sup>	Aug 29 <sup>ab</sup>
Colina – TP	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	0.115	ns	0.066
Colina – SRP	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	0.085	ns	0.048
Tuyll – TP	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	0.120	0.030	0.034
Tuyll – SRP	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	ns	0.095	0.026	0.029
Delevan – TP	0.050	0.044	ns*	0.043	0.052	0.043	0.043	0.066	0.044	0.081	0.043	0.121	0.052	dns
Delevan - SRP	0.048	0.051	0.044	0.046	0.045	0.039	0.043	0.046	0.045	0.047	0.043	0.071	0.040	dns

<sup>a</sup> More than 10 mm of rainfall in 24 hours prior to sampling.


<sup>b</sup> More than 10 mm of rainfall in 48 hours prior to sampling.

<sup>c</sup> More than 70 mm of rainfall in 3 days prior to sampling.

ns = no sample was collected due to lack of flow.

ns\* = bottle containing sample broke before analysis

dns = did not sample despite flow

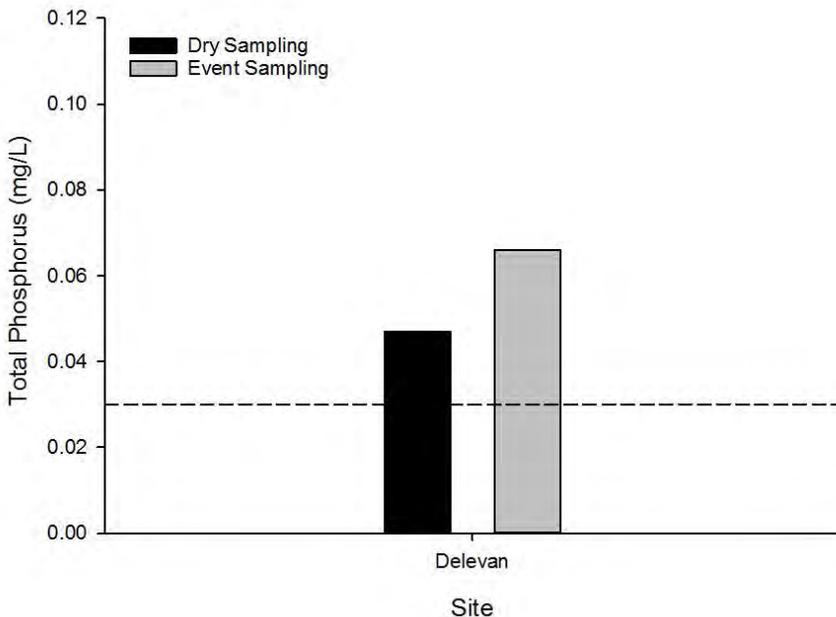


**Figure 3.** Dry (n=7) and event (n=5) sampling geometric mean total phosphorus concentrations in mg/L at one stormwater monitoring site draining into Lake Huron along the shoreline of Bayfield, Ontario in 2018. Dashed line indicates Provincial Water Quality Objective of 0.030 mg/L. Dry and event sampling geometric mean total phosphorus concentrations for Tuyll and Colina were not calculated due to insufficient samples.

#### *Soluble Reactive Phosphorus*

Soluble reactive phosphorus (SRP), also known as phosphate, is the portion of phosphorus that is readily available to aquatic plants. This fraction of TP can stimulate algal growth and contribute to algal blooms, and the increased loading of SRP has been cited as the main cause of the recent blooms in Lake Erie (IJC 2014).

SRP varied from 0.026 mg/L at Tuyll (August 27) to 0.095 mg/L at Tuyll (August 21) (Table 3). SRP as a percentage of TP was 96 percent at Delevan for dry sampling dates (Figure 4). Following rain events (event sampling) SRP as a percentage of TP at Delevan was 74 percent. SRP as a percentage of TP was not calculated for Tuyll or Colina for dry or event sampling as there were insufficient samples collected.

These SRP percentages indicate there is potential for eutrophication and algal blooms to occur along the shoreline if other required conditions (*e.g.*, temperature) are also met.

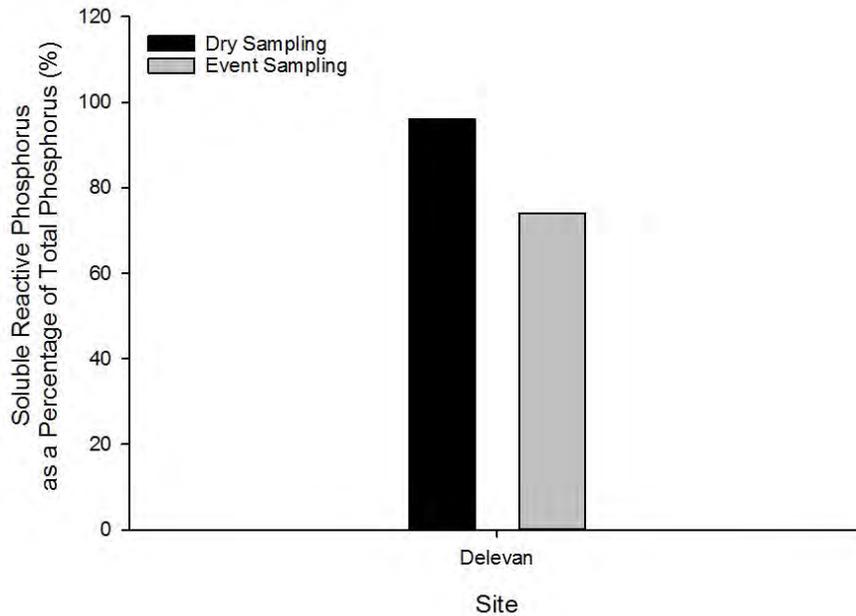

**Figure 4.** Dry (n=7) and event (n=5) sampling soluble reactive phosphorus as a percentage of total phosphorus at one stormwater monitoring site draining into Lake Huron along the shoreline of Bayfield, Ontario in 2018. Dry and event sampling percent soluble reactive phosphorus for Tuyll and Colina were not calculated due to lack of samples.

Non-point sources of phosphorus in urban areas can originate from construction sites, lawn and garden activities, leaves and animal waste (IJC 2014). In order to improve water quality at the beach and prevent algal blooms, the following actions can be taken to reduce phosphorus inputs to stormwater systems:

- Protect and create more naturalized areas
- Establish ground covers or use mulch on bare soil to prevent runoff
- Plant native plants, which require less fertilizer and water
- Install rain barrels
- Install filter strips, grass swales and rain gardens to slow water and increase filtration
- Reduce or eliminate the use of fertilizers containing phosphorus
- Leave lawn clippings and mulch leaves as opposed to piling leaves on the curb sides
- Clean eavestroughs and install gutter guards
- Pick up and properly dispose of pet waste
- Use designated car wash centres to wash vehicles
- Use permeable pavement to increase filtration

## **Next Steps**

1. Continue to monitor water quality, specifically *E. coli*, total phosphorus and soluble reactive phosphorus at the Colina, Tuyll and Delevan stormwater outfall sites.
2. As part of the stormwater master plan for the village of Bayfield, gain a better understanding of the watershed drained by 1) the Tuyll outfall, and 2) the ephemeral channel that emerges on the bank near Colina Street.
3. Continue to engage the local community with information about stormwater management and low impact development technologies (e.g., rain barrels, rain gardens) through outreach activities of the Main Bayfield Watershed Plan.
4. Continue to support community actions such as demonstration rain gardens.
5. Assist the Municipality of Bluewater in implementing low impact development technologies (e.g., permeable pavement, grass swales, rain gardens) for existing infrastructure and proposed developments.

## **Helpful Links**

### ***Low Impact Development***

<http://www.creditvalleyca.ca/low-impact-development/>

### ***Low Impact Development for Existing Development***

<https://www.lsrca.on.ca/Pages/Retrofitting-Existing-Development.aspx>

### ***Low Impact Development Stormwater Management Planning and Design Guide***

<http://www.creditvalleyca.ca/low-impact-development/low-impact-development-support/stormwater-management-lid-guidance-documents/low-impact-development-stormwater-management-planning-and-design-guide/>

### ***Rain Gardens in Bayfield***

<http://www.abca.on.ca/page.php?page=rain-gardens>

### ***Soak it Up! Toolkit***

<http://www.raincommunitysolutions.ca/en/toolkit/>

### ***Stormwater Management***

<https://trca.ca/conservation/stormwater-management/>

### ***Sustainable Stormwater Planning***

<http://conservationontario.ca/conservation-authorities/planning-and-regulations/sustainable-stormwater-planning/>


## **Acknowledgements**

The Bluewater Beach Committee would like to thank Ray Letheren, Margaret McBride, Sandy Scotchmer, Nathan and Corban Swartz, and Erica Clark for volunteering their time and collecting the water samples.


## References

- BM Ross (BM Ross and Associates Limited). 2014. Municipality of Bluewater Municipal Class Environmental Assessment for Development of a Stormwater Servicing Master Plan (Community of Bayfield). 65 p. + Appendices + Exhibits.
- BM Ross (BM Ross and Associates Limited). 1985. Report on Storm Drainage for the Village of Bayfield. 27 p. + Exhibit + Plans.
- Brock, H. and M. Veliz. 2017. Bayfield Beach Stormwater Monitoring 2017. Ausable Bayfield Conservation Authority. Exeter, Ontario. 16 pp.
- Brock, H. and M. Veliz. 2016. Bayfield Beach Stormwater Monitoring 2016. Ausable Bayfield Conservation Authority. Exeter, Ontario. 13 pp.
- Brock, H. and M. Veliz. 2016. Bayfield Beach Stormwater Monitoring 2015. Ausable Bayfield Conservation Authority. Exeter, Ontario. 13 pp.
- Brock, H. and M. Veliz. 2015. Bayfield Beach Stormwater Monitoring 2014. Ausable Bayfield Conservation Authority. Exeter, Ontario. 12 pp.
- CVC (Credit Valley Conservation). 2015. LID FAQs and Resources. Retrieved February 18, 2015, from: <http://www.creditvalleyca.ca/low-impact-development/low-impact-development-support/lid-faqs-and-resources/#whatislid>
- IJC (International Joint Commission). 2014. A Balanced Diet for Lake Erie: Reducing Phosphorus Loadings and Harmful Algal Blooms. Report of the Lake Erie Ecosystem Priority. 95 p.
- Mallin, M.A., K.E. Williams, E. C. Esham and R.P. Lowe. 2000. Effect of Human Development on Bacteriological Water Quality in Coastal Watersheds. *Ecological Applications*. 10(4): 1047-1056.
- MOEE (Ministry of Environment and Energy). 1994. Water Management Policies, Guidelines, and Provincial Water Quality Objectives of the Ministry of Environment and Energy. Government of Ontario Publication No. 3303E.


## Appendix

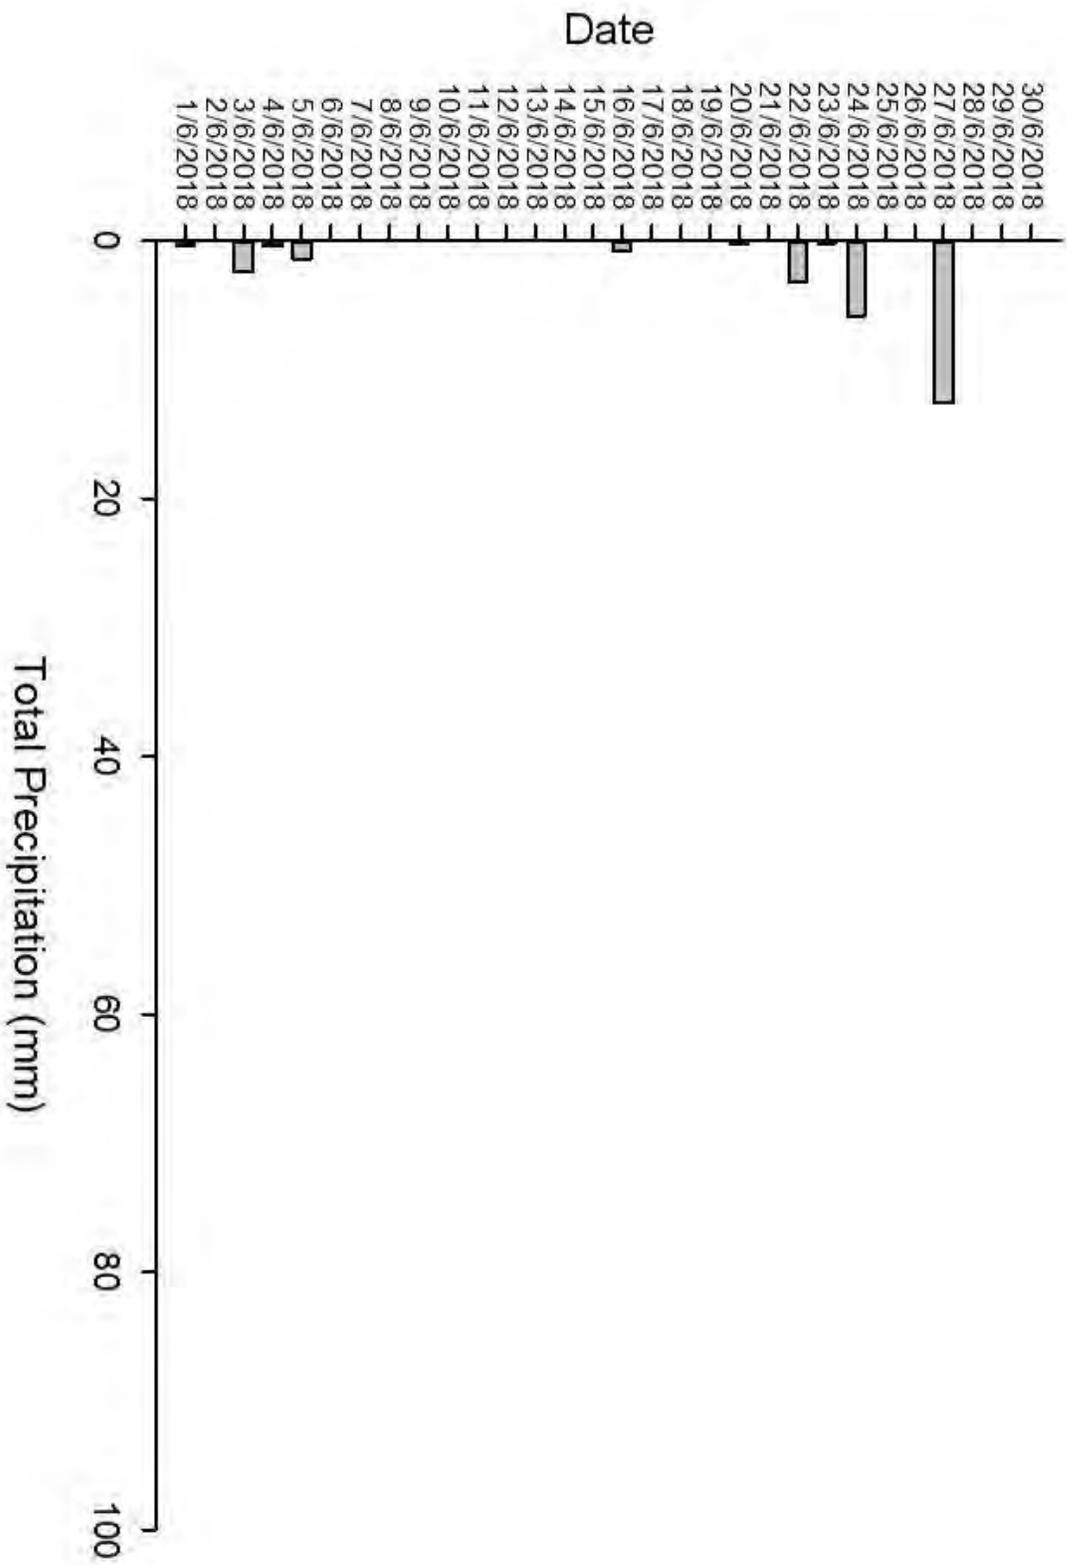

**Figure A1.** Total daily precipitation at Bayfield, Ontario during June 2018. This information is provisional and is collected as part of the Ausable Bayfield Conservation Authority (ABCA) Provincial Groundwater Monitoring Network (PGMN). The ABCA does not guarantee any accuracy standards other than those required for flood forecasting purposes and the PGMN.

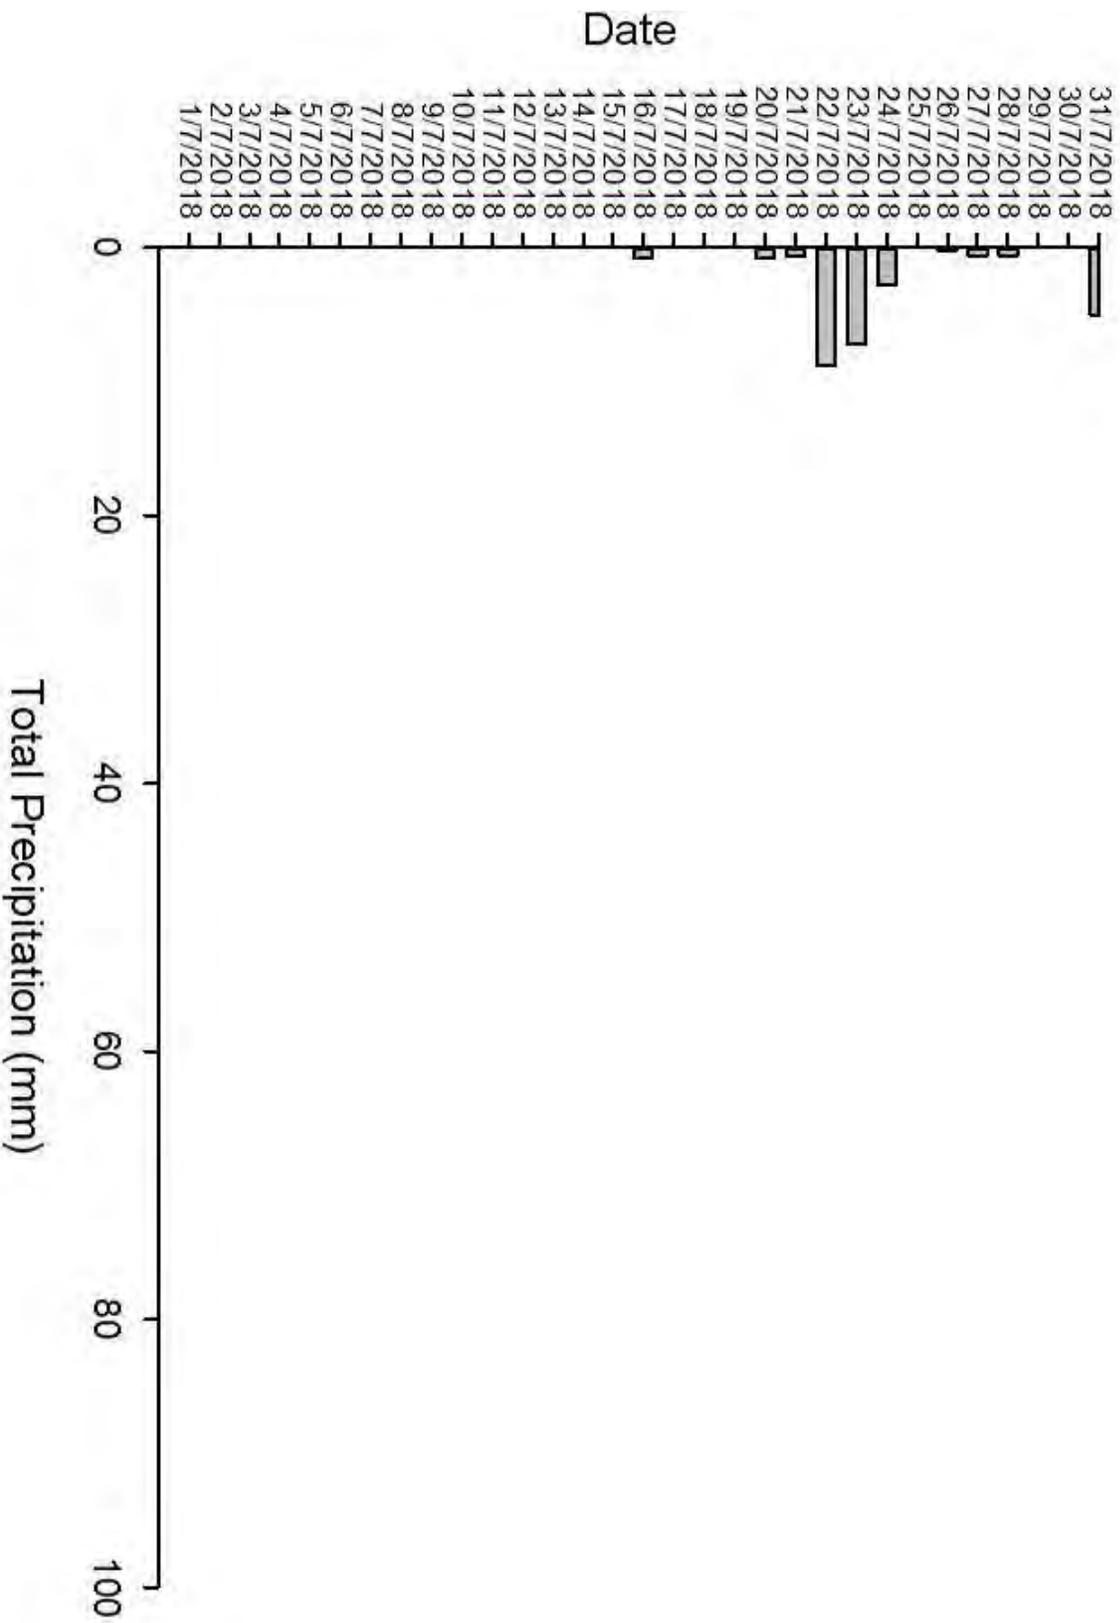

**Figure A2.** Total daily precipitation at Bayfield, Ontario during July 2018. This information is provisional and is collected as part of the Ausable Bayfield Conservation Authority (ABCA) Provincial Groundwater Monitoring Network (PGMN). The ABCA does not guarantee any accuracy standards other than those required for flood forecasting purposes and the PGMN.

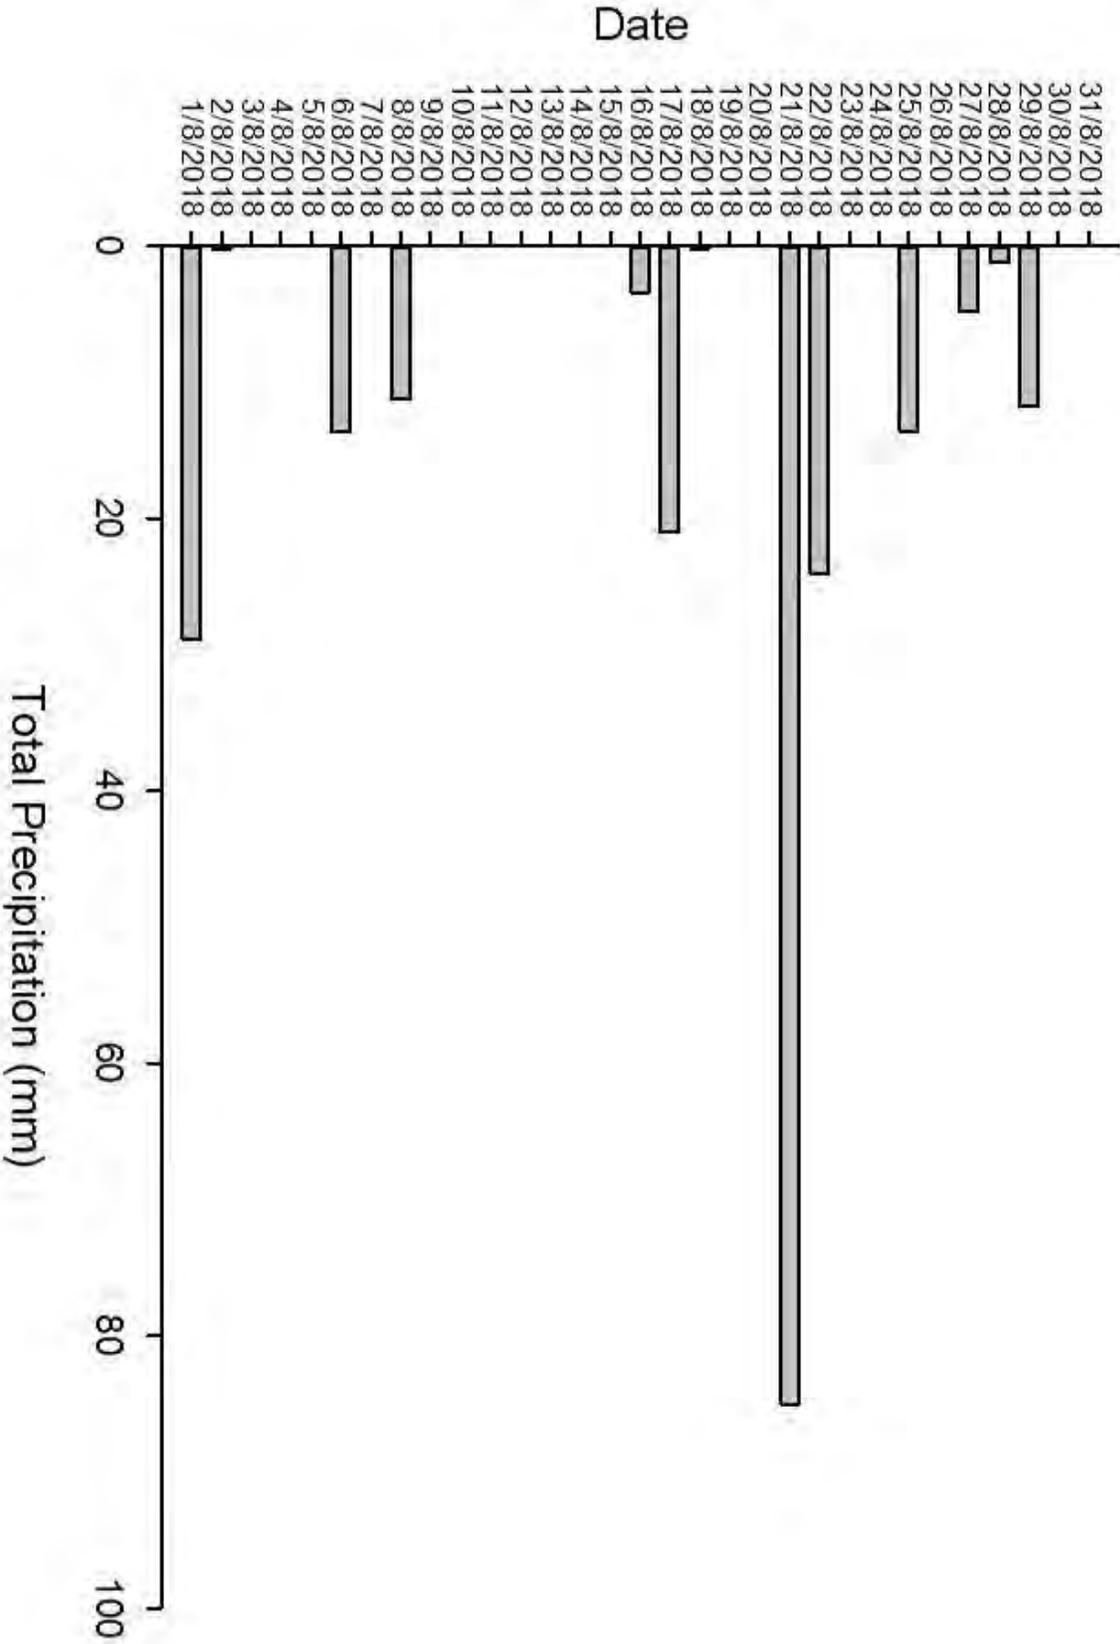

**Figure A3.** Total daily precipitation at Bayfield, Ontario during August 2018. This information is provisional and is collected as part of the Ausable Bayfield Conservation Authority (ABCA) Provincial Groundwater Monitoring Network (PGMN). The ABCA does not guarantee any accuracy standards other than those required for flood forecasting purposes and the PGMN.